

SILO


& FEED WEIGHING SYSTEMS



www.tarimar.com.tr

tarımar

SILO SYSTEM

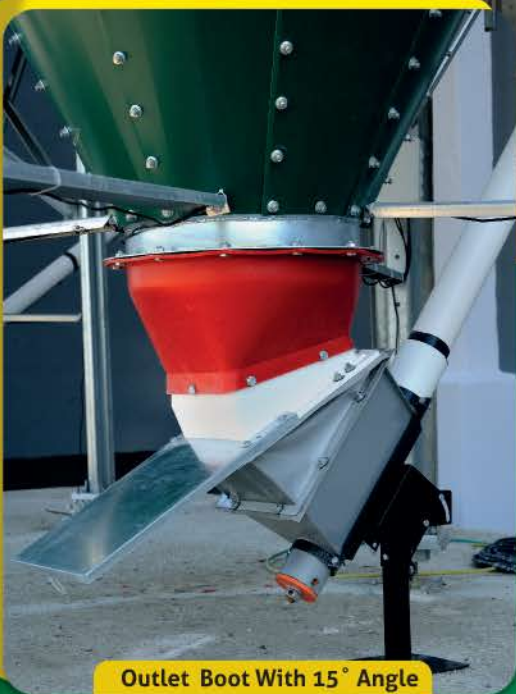

Outlet Boot With 15° Angle

- The Tarimar feed silos are produced from prelaquered and corrugated steel sheet. The coated is both from inside and outside of the silo.
- The feed level viewer, access door to the silo, silo ladder with safety are in standard.
- Special design allows less direct sun light.
- The design and prelaquered material reduce the heat and humidity inside the silo.
- The options of mechanical or pneumatically loading are available.
- The 75mm feed transport conveyor delivers 1800 kg/hour; 90mm feed transport conveyor delivers 4000 kg/hour.

Model	Diameter	Height	m ³	Tones
8008-1	2,55	4,880	12	7,9
8008-2	2,55	6,020	17	11,7
8008-3	2,55	7,160	23	15,5
8008-4	2,55	8,300	31,5	20,5

Single Outlet Boot



Double Outlet Boot



Quad Outlet Boot



Access Door



Safety Ladder



Feed Level Viewer



Motordrive Unit



125 mm Drop Point With Motor Valve



Standard Drop Point

