


LIGHTING

SYSTEMS

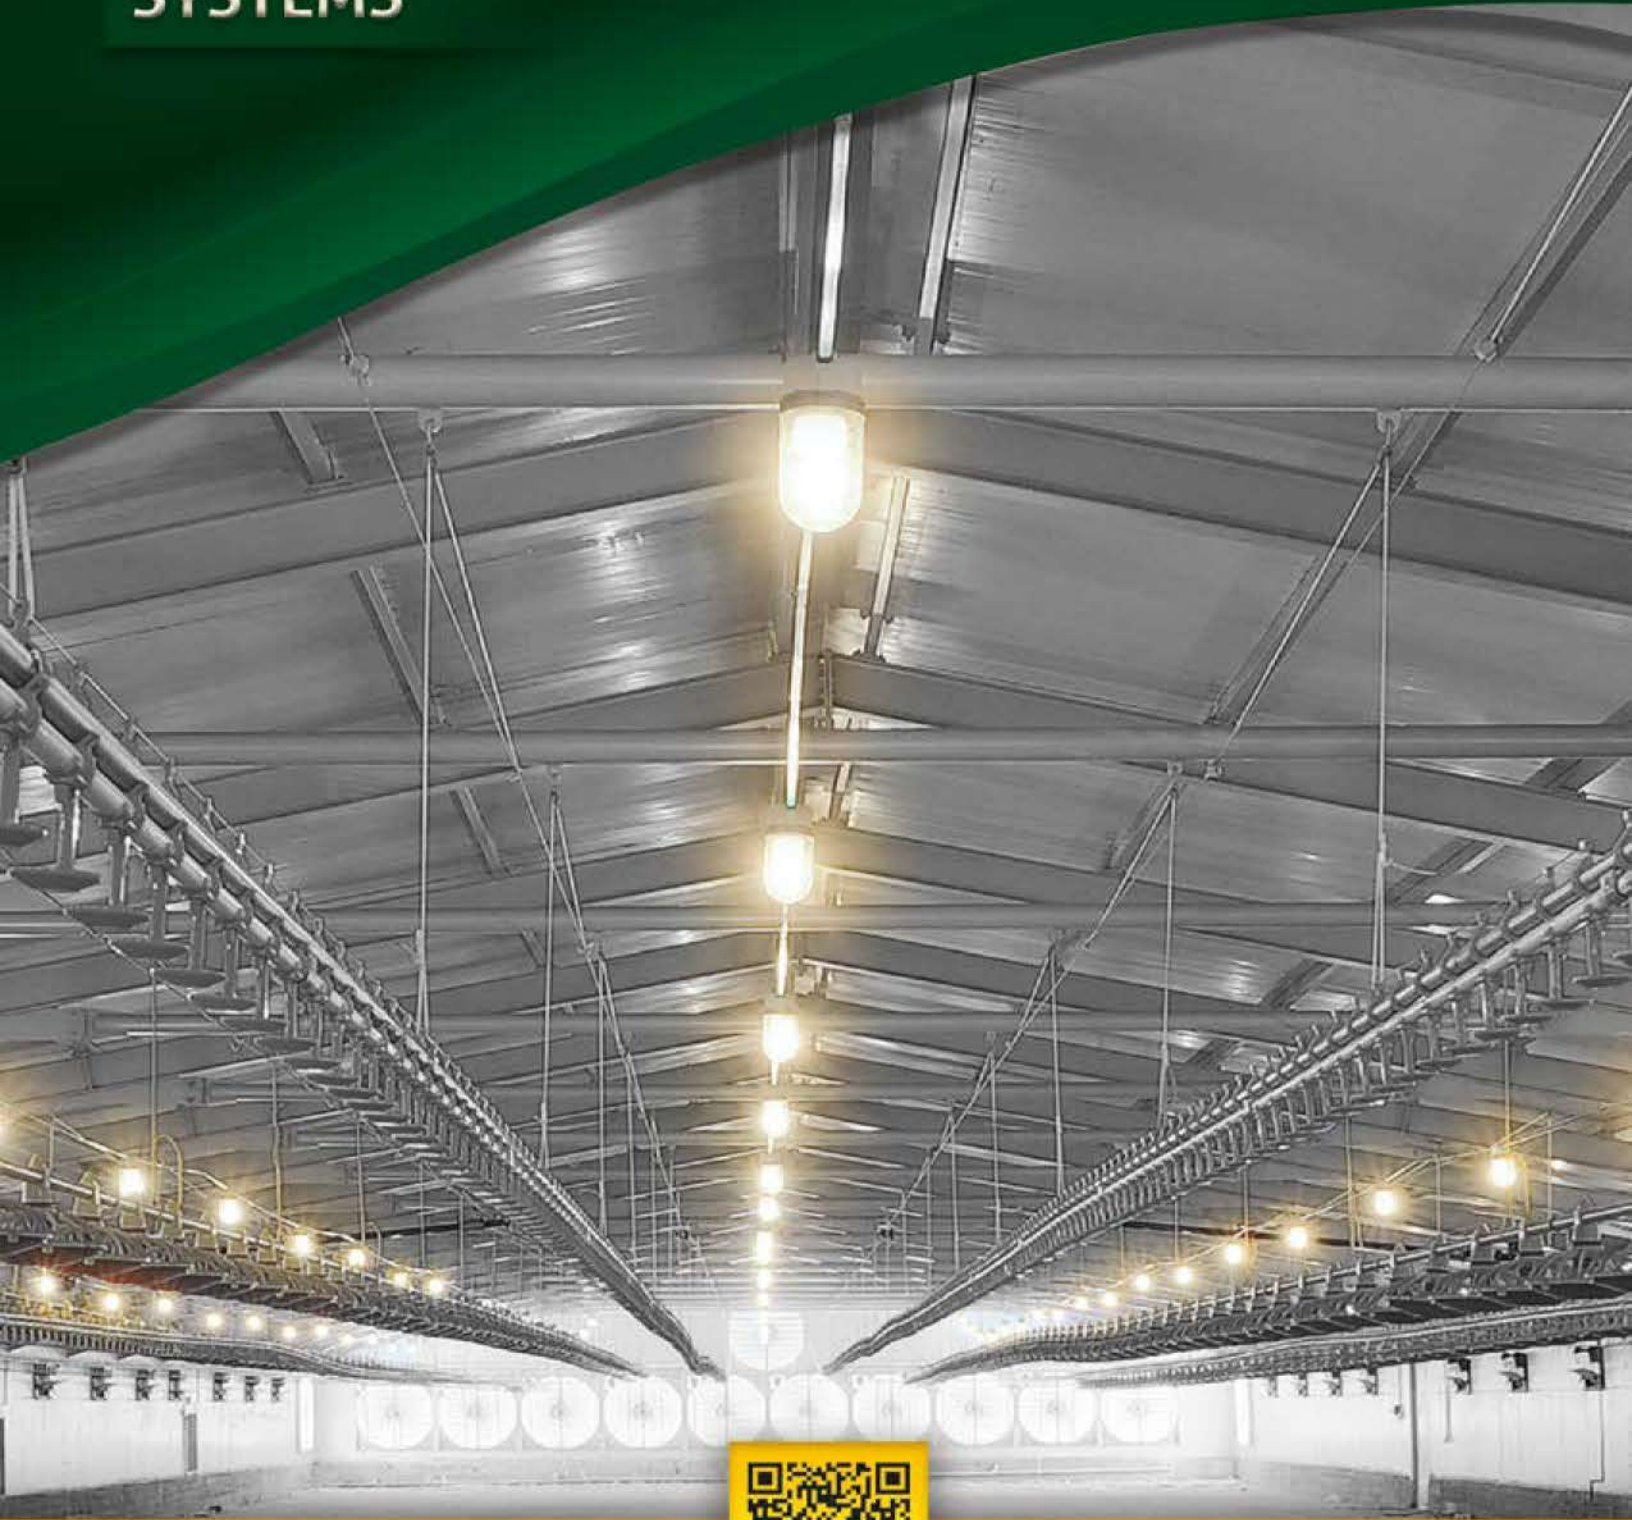

www.tarimar.com.tr

 tarimar

LED LIGHTING




XENA 7 WATT



- ▶ More than 53% energy saving compared to energy saving fluorescent lamps
- ▶ With extra wide beam angle more homogeneous light distribution in house
- ▶ Average 25.000 hours lifespan
- ▶ Light colour Warmwhite 3000K
- ▶ With socket system, LEDs can be installed in any distances
- ▶ With plastic body and LED cooler, it does not warm up
- ▶ Directly full luminous flux
- ▶ With transparent protection cover, free of water and dust during cleaning period
- ▶ With plastic covered protected flat wire, easy and safe installation
- ▶ Dimmable 0-100%
- ▶ 1 Dimmer can operate 140 pieces XENA 7 WATT LED

Technical Specifications

Brightness	650 lumen
Light Colour	Warmwhite 3000K
Dim rate	0-100%
Power	7 Watt

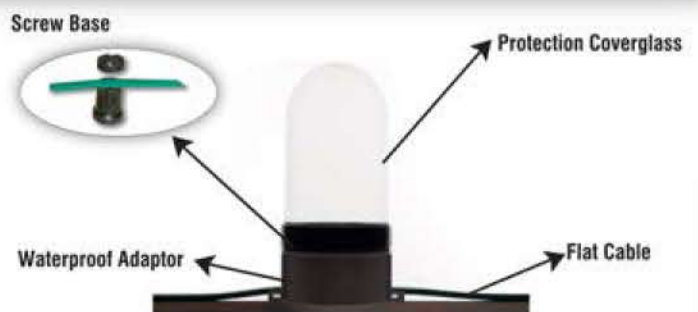

FLUORESCENT LIGHTING



ECO 11 WATT



- ▶ More than 80% energy saving compared to incandescent bulbs
- ▶ Extra White beam angle >270°
- ▶ Average 12.000 hours lifespan
- ▶ Light colour Warmwhite 2900K
- ▶ With socket system, lamps can be installed in any distances
- ▶ With transparent protection cover, free of water and dust during cleaning period
- ▶ With plastic covered protected flat wire, easy and safe installation
- ▶ Dimmable 0-100%
- ▶ 1 Dimmer can operate 100 pieces ECO-11WATT

Electronic Dimmer



Protection Coverglass



Technical Specifications

Brightness	480 lumen
Light Colour	Warmwhite 2900K
Dim rate	0-100%
Power	11 Watt



FLUORESCENT LIGHTING



WHITE 900 LUMEN



BLUE 300 LUMEN



GREEN 1200 LUMEN



RED 650 LUMEN



- ▶ 11 watt Blue, Green, Red and White colour alternatives
- ▶ With transparent protection cover, free of water and dust during operation
- ▶ Reduces the electricity cost (average 75% energy saving compared to incandescent bulbs)
- ▶ Seperate electronic adaptor and plug in lamp body
- ▶ Easy installation
- ▶ Dimmable 30-100%
- ▶ 1 dimmer can operate 180 pieces lamps
- ▶ For broiler blue and green colour lamps; for breeder red and white colour lamps are recommended

DIMMER

